

# FSW17P

## Flange Spreading Wedge

**A Hydraulic Flange Spreading Wedge with a combined hydraulic cylinder and pump unit.**

The FSW17P flange spreading wedge can enter a flange joint access gap as small as 6mm (0.24") and produce a maximum force of 326kN (32.6T) when used in pairs (as recommended) to push the mating faces of flanges apart.


The FSW17P can create a gap up to 81mm (3.19") between flange faces with the stepped blocks fitted facilitating the replacement of gaskets, seal ring's, or other flange face maintenance and testing.

- 100% Load/Pressure tested and certified
- High durability High Quality low Maintenance design
- Tool weight 8.5Kg (18.7lbs)
- **Max Spreading force**  
163kN (16.3T)  
(326kN (32.6T) when used in pairs)
- **Spreading distance**  
6mm (0.24") to 81mm (3.19") when used with stepped blocks
- **Robust Moulded Case**  
for easy transportation and storage



# FSW17P

## Flange Spreading Wedge

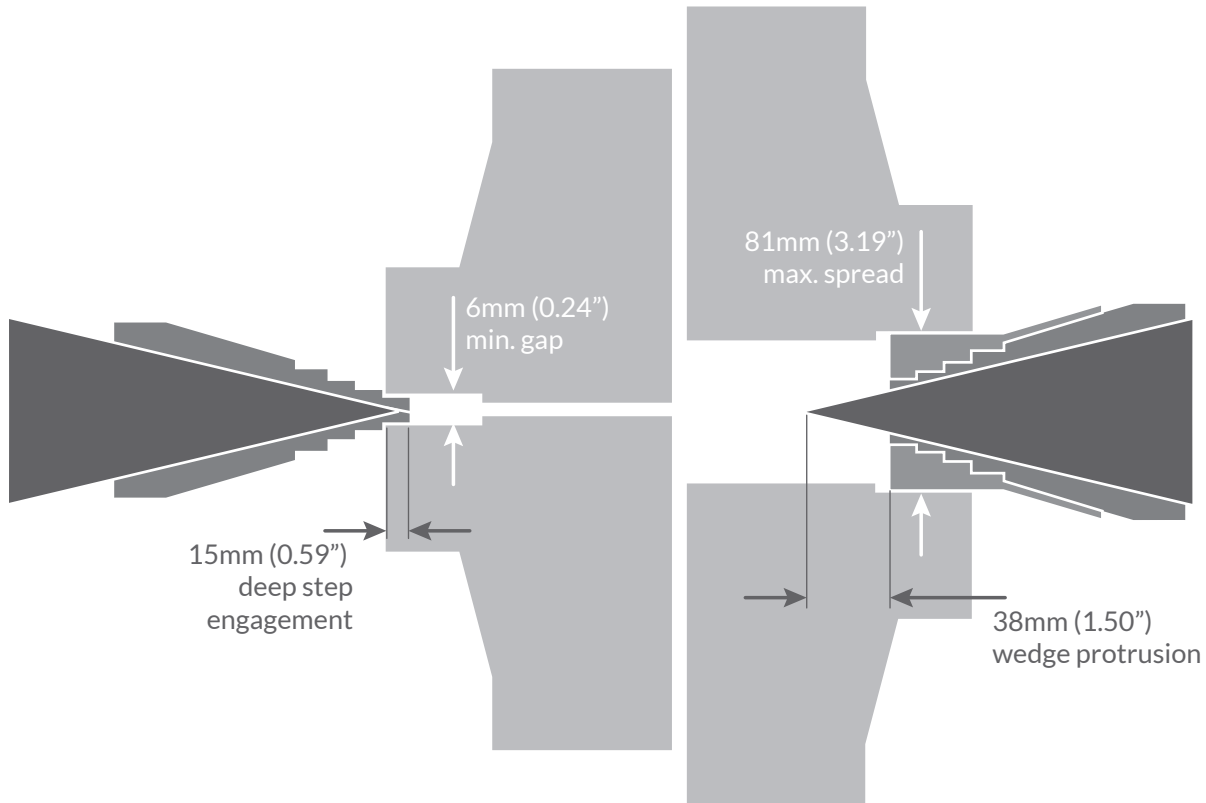

**Kit weight:** 13Kg (28.7lbs)

**Kit Dims.:** 580mm x 340mm x 180mm  
(22.8" x 13.4" x 7.1")

**Tool Weight:** 8.5Kg (18.7lbs)

**Tool Dims.:** 76mm x 155mm x 440mm  
(3.0" x 6.1" x 17.3")

**Product ordering code:** FSW17P

### Kit Content

- 1 x FSW17P Tool with combined hydraulic cylinder and pump unit
- 1 x Pump Actuating Handle
- 1 x Safety Block
- 1 x Safety Lanyard
- 2x Stepped Blocks with securing screws and allen key
- 1 x Instruction Manual
- 1 x Robust moulded carry case



[www.festectools.com](http://www.festectools.com)

E: [info@festec.nl](mailto:info@festec.nl)  
T: +31 (0)76 3030500