

WJ19P

Hydraulic Lifting Wedge Jack

A Hydraulic Lifting Wedge Jack with a combined hydraulic cylinder and pump unit.

The WJ19P lifting wedge jack can enter an access gap as small as 9.5mm (0.37") and produce a maximum lifting force of 183kN (18.3T) up to a height of 67.5mm (2.66") when fully actuated.

The WJ19P tools can be used in any orientation making them suitable for lifting, pushing and spreading applications.

- **High durability High Quality low Maintenance design**
- **Tool weight** 9.5Kg (20.9lbs)
- **Max Lifting force**
183kN (18.3T)
- **Lifting distance**
9.5mm (0.37") to 67.5mm (2.66") when used with stepped block
- **Robust Moulded Case**
for easy transportation and storage

Comfort Handle grip
for easy handling

Forged steel Jaws
for strength and safety

**15mm (0.59")
deep Jaw steps**
gives stability when
spreading

**Combined Hydraulic
cylinder and pump unit**
no external pump and
hose required


**Parallel action
Jaw spreading**
maintains secure grip

Interlocking jaws
gives added strength and
durability with only
9.5mm (0.37") tip width



WJ19P

Hydraulic Lifting Wedge Jack

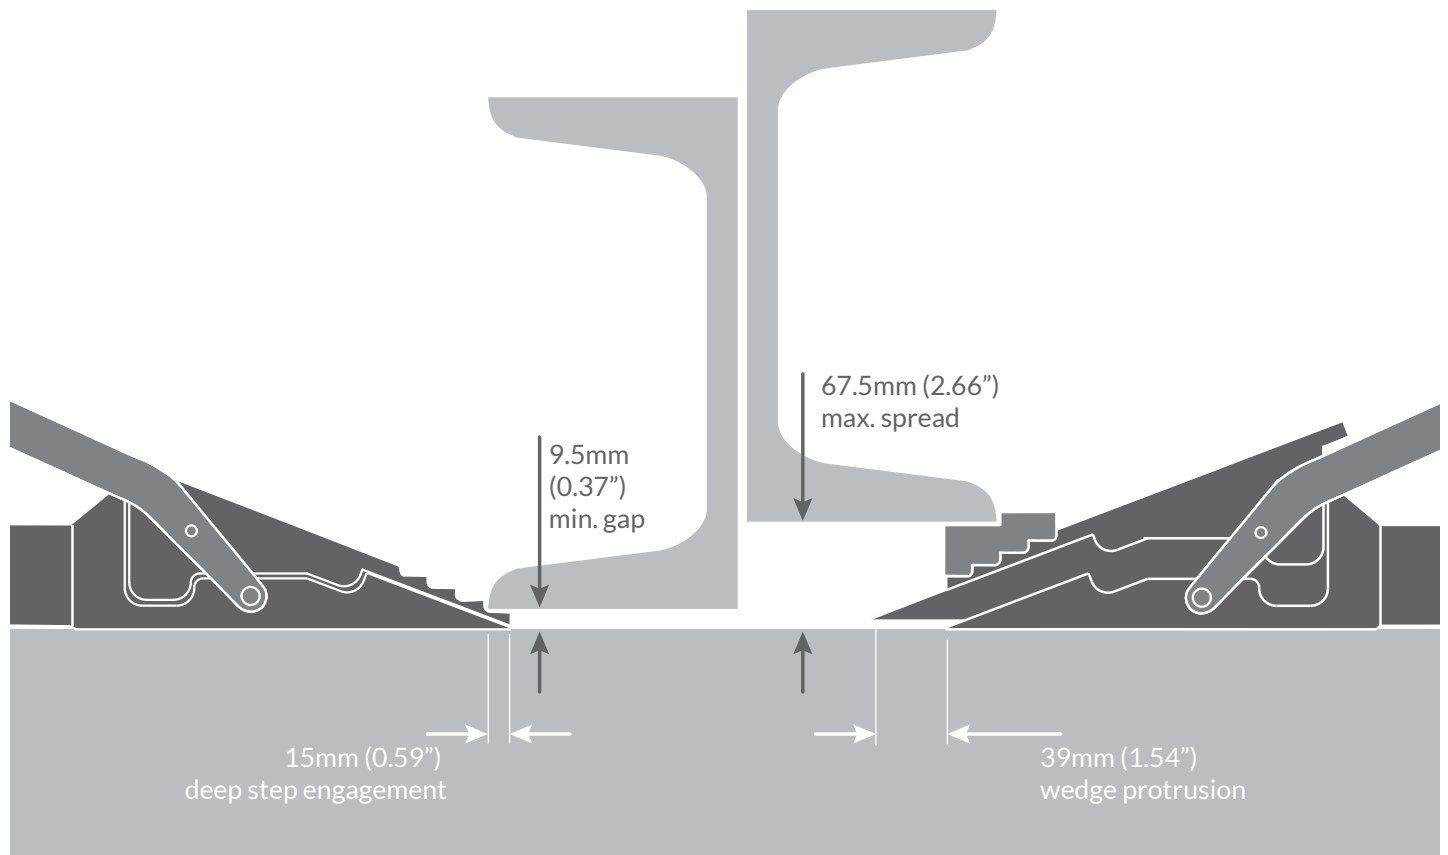

Kit weight: 14Kg (30.9lbs)

Kit Dims.: 580mm x 340mm x 180mm
(22.8" x 13.4" x 7.1")

Tool Weight: 9.5Kg (20.9lbs)

Tool Dims.: 105mm x 135mm x 450mm
(4.1" x 5.3" x 17.7")

Product ordering code: WJ19P

Kit Content

- 1 x WJ19K Tool with combined hydraulic cylinder and pump unit
- 1 x Pump Actuating Handle
- 1 x Safety Block
- 1 x Safety Lanyard
- 1 x Stepped Block with securing screw and allen key
- 1 x Instruction Manual
- 1 x Robust moulded carry case



www.festectools.com

E: info@festec.nl

T: +31 (0)76 3030500